

Metrotile

worldwide roofing systems















A traditional and attractive roof with timeless effect


The Multibond provides traditional beavertail clay tile aesthetics without the concerns of heavy weight and tile breakage.

Several rows in height and five columns combined in a single panel, provides a maximum coverage and reduces labor expense.

Specifications on reverse side.

Multibond

Formed from the highest quality steel and protective coatings, the panel is incredibly strong, lightweight and weather resistant.

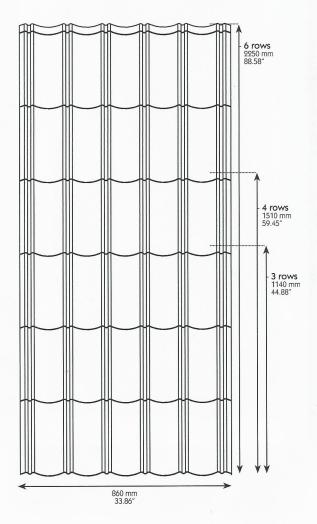

Minimum pitch	10°	2/12
Maximum pitch	90°	vertical
Size of tile - overall*	860 x 2250 mm	33.86" x 88.58
Size of tile - cover*	795 x 2205 mm	31.3" x 86.81"
Gauge of steel**	0,45 mm	26 gauge
Linear cover width*	795 mm	86.81"
Coverage*	0,57 pc/m ²	5.3 pc/square
Coverage of a panel*	1,75 m²	18.87 ft ²
Weight per panel*	10,26 kg	22.61 lb

 $^{^{\}circ}$ With a tolerance of \pm 3 mm on measurements and minimal tolerance in weight. $^{\circ}$ Steel thickness according to the EN 10346.


STANDARD COLORS



More colors available. Ask your dealer for information.

INSTALLATION

The Multibond has to be installed from left to right.

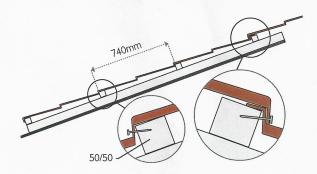

The panels are placed onto battens of 50x50 mm spaced 740

A downturned front edge (nose) and upturned rear edge (shelf) on each tile creates a strong, weatherproof, overlapping and interlocking assembly. Each tile is secured with four nails in the panel nose, away from water channels.

ACCESSORIES

We offer a broad range of accessories.

- Ridges, junctions and end caps. Offered in angled, squared and curved profiles.
- Fascia, sidewall and headwall transition flashings.
- Ventilation systems.
- Installation Equipment: nails, benders, guillotines. It is important to use tools recommended by us.

For a complete and detailed list of accessories and more information regarding the installation of a Bond roof, contact your dealer.